

F8300-SC 695 DU

F8300-MH77 695 DU

F8300-H 695 DU

DOOR CLOSERS F8500 SERIES




STANDARD FEATURES


- UL and CUL listed, meet ANSI A 156.4 grade 3
- Size 2, Size 3 is selectable
- Non handed
- Standard sweep and latching
- **Standard Bi-packed for regular arm and top Jamb;**
- Standard Finish:Aluminum(AL); Duronodic (DU)
- 3 years warranty

OPTIONAL FEATURES


- Parallel arm Bracket

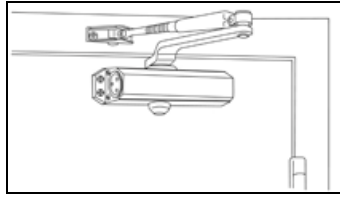

Regular arm-Pull Side

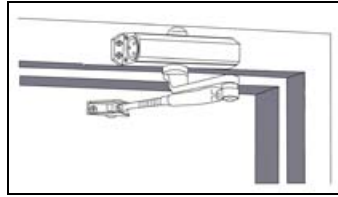

Top Jamb-Push Side

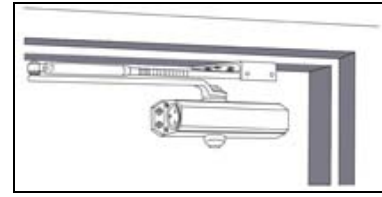

Parallel arm-Push Side

TECHNICAL DIMENSIONS.

Description	Dimensions		
A. Length of Closer Body	7-1/8" (181 mm)		
B. Horizontal Mounting Holes	6-1/2" (165 mm)		
C. Vertical Mounting Holes	3/4" (19 mm)		
D. Closer Body Height	1-5/8" (41 mm)		
E. Projection from Door	2 -15/32" (63 mm)		

SELECTION CHART

Model	Power Size	Applicable Door Weight Lbs (Kg)	Remarks
F8502	2	66-99 (30-45)	
F8503	3	99-143(45-65)	

Regular & Top Jamb				Parallel Arm			Applicable Door Weight Lbs (Kg)
Closer Size	Interior	Exterior Inswing	Maximum Size of Door				
			Exterior outswingin g	Closer Size	Interior	Exterior Outswinging	
2	36" (0.91 m)			2	30"(0.76m)		66-99 (30-45)
3	42"(1.07 m)	30" (0.76m)	36"(0.91m)	3	36" (0.91m)	30"(0.76m)	99-143(45-65)

OPTIONAL ACCESSORIES

Parallel Arm Bracket